


Basic Rack PDU

Overview

The American Power Conversion (APC[®]) Basic Rack Power Distribution Unit (PDU) distributes power to devices in the rack.

Outlets. The Rack PDU has 24 NEMA 5-15 outlets.

Power cord. The 3.05-m (10-ft) power cord terminates with a NEMA L5-30 connector.

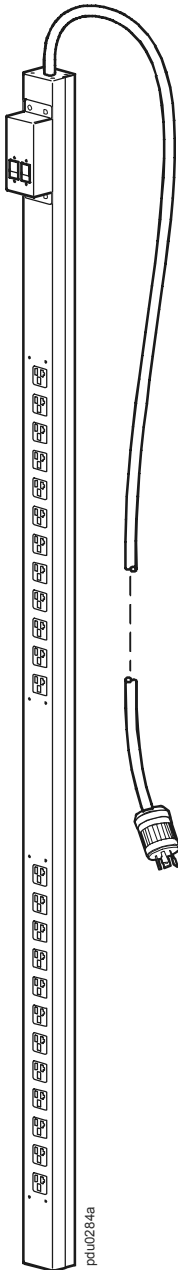

Specifications for AP7532J

Electrical

| | |
|--------------------------|-------------------------|
| Input connector | NEMA L5-30 plug |
| Output connectors | 24 NEMA 5-15 outlets |
| Nominal input voltage | 100 VAC |
| Acceptable input voltage | ± 10% of normal voltage |
| Input frequency | 47–63 Hz |

Physical

| | |
|------------------------------------|--|
| Size (H × W × D) | 161.92 × 5.56 × 4.39 cm (63.75 × 2.19 × 1.73 in) |
| Shipping Dimensions (H × W × D) | 213.36 × 15.24 × 12.7 cm (84.00 × 6.00 × 5.00 in) |
| Weight | 5.56 kg (12.25 lb) |
| Shipping weight | 6.46 kg (14.25 lb) |

Environmental

| | |
|----------------------------------|----------------------------|
| Maximum elevation (above MSL) | |
| Operating | 0–4500 m (0–15,000 ft) |
| Storage | 0–15 000 m (0–50,000 ft) |
| Temperature | |
| Operating | –5 to 45°C (23 to 115°F) |
| Storage | –25 to 65°C (–13 to 149°F) |
| Humidity | |
| Operating | 5–95% RH non-condensing |
| Storage | 5–95% RH non-condensing |

Compliance

| | |
|---------------------|------------|
| Safety verification | METI-DENAN |
|---------------------|------------|

