




RF 24-105mm f/4-7.1 IS STM

- Small and lightweight design.
- Versatile 24-105mm focal length is great for a wide range of shooting scenes, as well as for travel.
- 5 stop Image Stabiliser reduces camera shake during hand-held shooting.
- Intuitive lens control ring, offering customisable control over aperture, shutter speed, ISO or exposure compensation.
- Stepping motor for smooth high- speed and high- precision silent autofocus (STM).



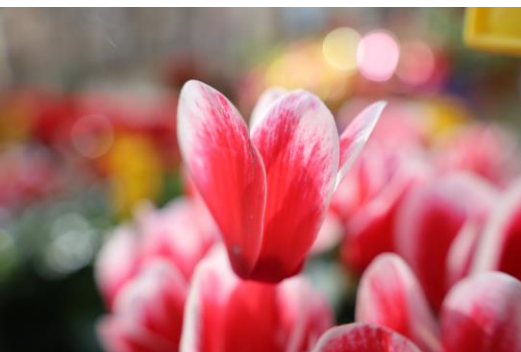

Technical Specifications

RF 24-105mm f/4-7.1 IS STM	
Mount	RF
Focal length	24-105 mm
Maximum aperture	f/4-7.1
Minimum aperture	f/22 – 40
Minimum focusing distance	During AF: 0.2 – 0.34 m During MF: 0.13 – 0.34 m
Maximum magnification	During AF: 0.4x (105mm) During MF: 0.5x (24mm)
Lens construction	13 elements in 11 groups
Aspherical lens	1
Special low dispersion glass	0
Special glass material	None
Special coating	None
Dust resistance, water resistance	None
Aperture blades	7 (circular)
IS (CIPA standard correction effect)	5.0 stops
Filter diameter	φ67 mm
Focus drive system	STM + lead screw
Maximum diameter and length	Approx. φ76.6 mm x 88.8 mm
Weight	Approx. 395g

Accessories



Lens Cap
E-6711
(Included)



Lens Hood
EW-73D
(Sold Separately)



Lens Pouch
LP1116
(Sold Separately)