


Single-Phase Metered PDU, 1.9kW 20A 120V, 36-in. 0U Vertical Rackmount, 14 NEMA 5-15/20R outlets, NEMA L5-20P input with 5-20P adapter

MODEL NUMBER: **PDUMV20-36**

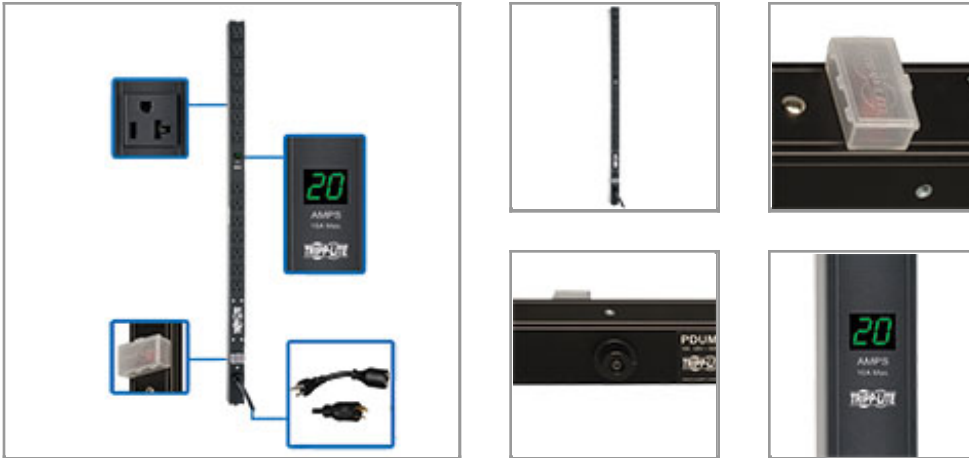

Description

Tripp Lite single phase Metered PDU / Power Distribution Units offer real-time local reporting of load level in amps via built-in digital display. Enables visual monitoring of PDU load levels to prevent overloads as additional equipment is added. Offers reliable rackmount multi-outlet power distribution from any protected UPS, generator or mains input power source. High quality design includes rugged all-metal housing and secure rackmount installation with included mounting accessories.

Features

- 20A single phase 120V Metered Power Distribution Unit / PDU (Agency de-rated to 16A continuous)
- Two-digit lighted meter reports combined total output current in amps
- Attached NEMA L5-20P input plug with 15ft / 4.6m line cord and 5-20P adapter
- 0U 36-in. / 91.4cm vertical rackmount format installs using no rack spaces
- 14 NEMA 5-15/20R outlets
- Includes 20A circuit breaker and lighted power switch inside a transparent protective cover
- Toolless installation supported in button-mount compatible equipment racks
- Bolt-down installation brackets support installation in other racks and additional surfaces

Highlights

- Metered single phase 120V 20A 0U 36-in. / 91.4cm vertical rackmount PDU
- Two-digit current meter reports output current in amps
- Attached 15ft / 4.6m cord with NEMA L5-20P plug and 5-20P adapter
- 14 NEMA 5-15/20R outlets
- Toolless button mount and bolt-down bracket installation hardware included

Applications

- Ideal means of powering networking equipment in datacenters, computer rooms and network closets

Package Includes

- PDUMV20-36 Metered Vertical PDU
- (1) L5-20P to 5-20P plug adapter
- Mounting hardware and spare mounting buttons
- Instruction manual with warranty information

Specifications

SELECTOR	
Selector Type	PDU'S
General Info	



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Product Group	PDUS
SELECTOR	
Digital Load Meter	Yes
Redundant Power Cords	No
SNMP Compatible	No
General Info	
TAA Compliant	No
OVERVIEW	
Style	Vertical Rackmount
PDU Type	Metered
OUTPUT	
Output Capacity Details	1.9kW (120V input), 2.0kW (127V input), 1.6kW (100V input); 20A maximum (Agency de-rated to 16A continuous)
Frequency Compatibility	50 / 60 Hz
Output Nominal Voltage	100-127V nominal, single phase
Overload Protection	20A
Outlet Quantity / Type	14 NEMA 5-15/20R
Number of Outlets	14
Outlet Type	NEMA 5-15/20R
INPUT	
PDU Input Voltage	100; 120; 127
Maximum Input Amps	20
Maximum Input Amps Details	Agency de-rated to 16A continuous
PDU Plug Type	NEMA 5-20P; NEMA L5-20P
Input Cord Length (ft.)	15
Input Cord Length (m)	4.6
Input Phase	Single-Phase
LEDS ALARMS & SWITCHES	
Switches	Lighted on/off switch with integrated transparent safety cover
Front Panel LEDs	Digital ammeter display
PHYSICAL	



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Shipping Dimensions (hwd / in.)	2.6 x 38.93 x 6.78
Shipping Dimensions (hwd / cm)	6.6 x 98.9 x 17.22
Shipping Weight (lbs.)	3.79
Shipping Weight (kg)	1.72
Unit Dimensions (hwd / in.)	36 x 1.75 x 1.25
Unit Dimensions (hwd / cm)	91.4 x 4.45 x 3.18
Unit Weight (lbs.)	3.2
Unit Weight (kg)	1.45
Material of Construction	Aluminum
Form Factors Supported	Vertical
PDU Form Factor	Vertical (0U)
SPECIAL FEATURES	
KVM Demo Flag	0
US & Canada Only Flag	0
Console Server Demo Flag	0
CERTIFICATIONS	
Certifications	Tested to UL60950-1 (USA), UL/CSA60950-1 (Canada), NOM (Mexico), FCC Class A (Emissions), RoHS Compliant
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2015 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.