


USB-C to USB-A Adapter (M/F), USB 3.1 Gen 1 (5 Gbps), Thunderbolt 3 Compatible, 6-in. (15.24 cm)

MODEL NUMBER: **U428-06N-F**

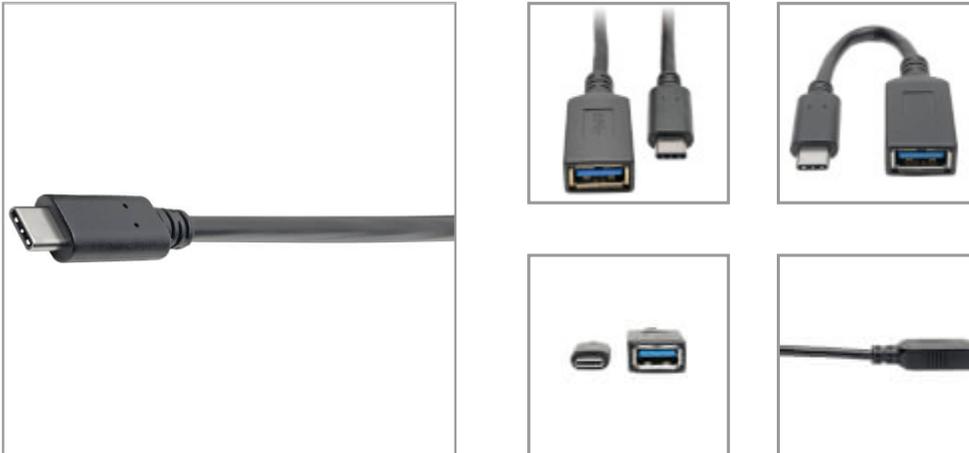

Allows an existing Type-A device or cable to connect with the USB Type-C™ (USB-C) port on your smartphone, tablet, Ultrabook or computer.

Features

Supports USB 3.1 Gen 1

- Data transfer speeds up to 5 Gbps—10 times faster than USB 2.0
- Power output up to 3A—perfect for fast charging of most mobile devices
- Uses same Type-A female connector as USB 3.0 devices

USB Type-C (USB-C) Male Connector

- Fumble-free reversible plug ensures fast, easy connection every time
- Powerful enough for smartphones, tablets, computers and other larger platforms

Premium Construction

- Gold-plated copper contacts and nickel-plated molded ends provide a lifetime of heavy use and superior conductivity
- Superior foil shielding offers reliable, error-free data communication
- Slim, sleek design tailored for emerging design trends toward smaller devices
- Portable 6-inch length for easy storage in laptop case or backpack

Specifications

OVERVIEW

Highlights

- Allows a male USB Type-A device or cable to connect with a USB Type-C (USB-C) device
- Supports USB 3.1 Gen 1 data transfer speeds up to 5 Gbps
- Provides power output up to 3A
- Features reversible USB Type-C male plug on one end
- Works with USB 3.0 devices

System Requirements

- A device with a USB Type-C (USB-C) port
- A device or cable with a USB Type-A male connector

Package Includes

- U428-06N-F USB 3.1 Gen 1 (5 Gbps) Adapter Cable, USB Type-C (USB-C) to USB Type-A M/F, 6 in.



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

UPC Code	037332189295
Technology	USB 3.1 (Gen 1); USB
PHYSICAL	
Color	Black
Cable Outer Diameter (OD)	4.5MM
Cable Jacket Rating	VW-1
Cable Length (ft.)	0.5
Cable Length (m)	0.2
Cable Length (in.)	6
Material of Construction	PVC
Cable Length (cm)	15.24
Shipping Dimensions (hwd / cm)	17.78 x 22.86 x 1.27
Shipping Dimensions (hwd / in.)	7.00 x 9.00 x 0.50
Shipping Weight (kg)	0.02
Shipping Weight (lbs.)	0.05
ENVIRONMENTAL	
Operating Temperature Range	14 to 140 F (-10 to 60 C)
Storage Temperature Range	-4 to 185 F (-20 to 85 C)
Relative Humidity	10% to 85%, Non-Condensing
CONNECTIONS	
Side A - Connector 1	USB C (MALE)
Side B - Connector 1	USB 3.0 A (FEMALE)
Connector Plating	Nickel
Contact Plating	Gold
FEATURES & SPECIFICATIONS	
USB Specification	USB 3.1 Gen 1 (up to 5 Gbps)
STANDARDS & COMPLIANCE	
Certifications	Tested to CE, FCC, RoHS, REACH
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>