



---

## Lexmark CX931dtse

Space-saving design and large-format flexibility

---



# Lexmark CX931dtse

The Lexmark CX931dtse large-format color multifunction is designed for security, usability and reliability for large workgroups at speeds up to 35 pages per minute\*. Smaller and lighter than equivalent predecessor models, it fits better into tight spaces, while still providing the media input and finishing options you need.



## Productivity in a smaller box

- ▶ 20% smaller and 25% lighter than its predecessors, the CX931dtse comes standard with many features to keep your business at maximum productivity.
- ▶ It includes workflow solutions like Scan Center for simple document routing, Optical Character Recognition (OCR), and the Intelligent Storage Drive (ISD) for solid state storage with activation-ready preloaded add-on solutions.
- ▶ A large, button-free touchscreen helps users intuitively complete every task, from the basic to the complex.

## Flexible input and output

- ▶ Print and scan paper sizes up to A3 (11.75 x 16.5 inches, 297 x 420 mm).
- ▶ Standard input capacity is 2,180 pages; optional trays expand paper input capacity up to 4,180 pages.
- ▶ Finishing options include a staple finisher and a staple hole punch finisher.

## Enhance professional image with brilliant color for large-format printing

- ▶ Enjoy vibrant color with standard advanced features like PANTONE® calibration and Lexmark Named Color

Replacement for consistent branding and professional appearance.

- ▶ Replacement cartridges yield up to 28,000/16,500 black/color pages\*\*.

## Secure by design

- ▶ Lexmark security features help keep your information safe—in the document, on the device, over the network and at all points in between.
- ▶ Always improving security, we now include a standard Trusted Platform Module\*\*\*, which delivers authentication, system integrity checks, and cryptographic capabilities to create a unique digital system fingerprint.

## Always focused on sustainability

- ▶ CX931dtse is designed for the circular economy.
- ▶ Automatic two-sided printing is standard, along with built-in energy-saving modes that help support ratings of EPEAT® Silver and ENERGY STAR® certified.
- ▶ The award-winning Lexmark Cartridge Collection Program (LCCP) and Lexmark Equipment Collection Program (LECP) minimize waste and support recycling (availability varies by country).

## Power up with IoT

- ▶ Our sophisticated, IoT-enabled printers are loaded with sensors that continuously monitor hundreds of data points.
- ▶ When you connect your device to Lexmark Cloud Services, you can optimize performance and uptime with additional features like predictive service and automatic supplies replenishment.


This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

\* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

\*\* Average continuous black or continuous composite color (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798. Actual yield will vary considerably based upon many factors. See [www.lexmark.com/yields](http://www.lexmark.com/yields) for more information.

\*\*\* The Trusted Platform Module (TPM) is not available in some countries.

# Lexmark CX931dtse

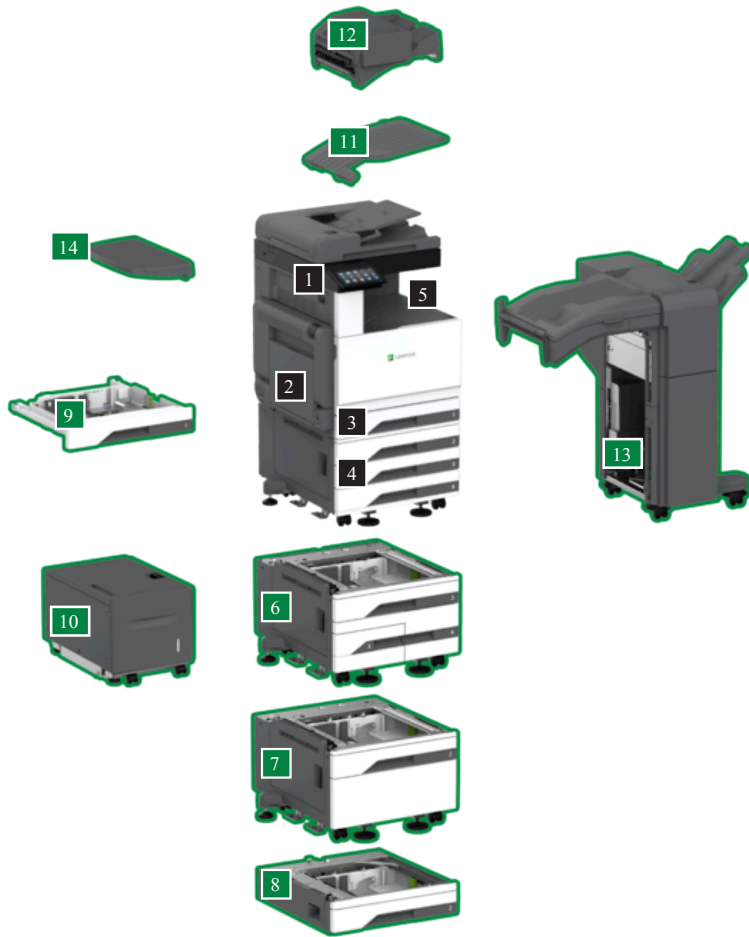

- 1 **Multifunction product with 7-inch (17.8 cm) touch screen**  
44.1 x 23.2 x 27.5 in.  
1119 x 590 x 699.3 mm
- 2 **100-Sheet multipurpose feeder**  
Dimensions included as part of base model
- 3 **520-Sheet tray**  
Dimensions included as part of base model
- 4 **3 x 520-Sheet tray with casters**  
Dimensions included as part of base model
- 5 **400-Sheet output bin**  
Dimensions included as part of base model
- 6 **2520-Sheet Tandem Tray with Caster**  
15 x 24.2 x 24.4 in.  
381.6 x 615.7 x 620 mm
- 7 **520-Sheet Tray with Caster Cabinet**  
15 x 24.2 x 24.4 in., 15 x 24.2 x 24.4 in.  
381.6 x 615.7 x 620 mm, 381.6 x 615.7 x 620 mm
- 8 **520 Sheet Tray**  
5.3 x 21.3 x 23.1 in.  
133.5 x 540 x 586 mm

- 9 **CX93x/MX93x Envelope Tray**  
3.4 x 26.9 x 26.1 in.  
160 x 684 x 664 mm
- 10 **2000-Sheet Tray**  
19.3 x 29.6 x 20.7 in.  
491 x 751 x 526 mm
- 11 **Dual Catch Bin**  
4.8 x 17.6 x 14.9 in.  
123 x 447 x 378 mm
- 12 **500-Sheet Staple Offset Finisher**  
9.4 x 18.8 x 18.1 in.  
238 x 478 x 460.5 mm
- 13 **2000-Sheet Staple 2/3 Hole Punch Finisher**  
38.7 x 37.9 x 25.7 in.  
983 x 962 x 653 mm
- 14 **Work Table**  
2.3 x 11.9 x 19.1 in.  
58 x 301 x 486 mm

- Standard
- Optional

<b>P/N</b>	<b>Hardware</b>
32D0250	Lexmark CX931dtse
<b>P/N</b>	<b>Supplies</b>
85D00C0	Lexmark CX930, 931 Cyan 5K Toner Cartridge
85D00K0	Lexmark CX930, 931 Black 5K Toner Cartridge
85D00M0	Lexmark CX930, 931 Magenta 5K Toner Cartridge
85D00Y0	Lexmark CX930, 931 Yellow 5K Toner Cartridge
85D0HC0	Lexmark CX930, 931 Cyan 16.5K Toner Cartridge
85D0HK0	Lexmark CX930, 931 Black 28K Toner Cartridge
85D0HM0	Lexmark CX930, 931 Magenta 16.5K Toner Cartridge
85D0HY0	Lexmark CX930, 931 Yellow 16.5K Toner Cartridge
85D0P00	Lexmark CX930, 931, XC9325, 9335 Black 87K Photoconductor
85D0Q00	Lexmark CX930, 931, XC9325, 9335 3-Pack 87K Photoconductor Kit
85D0W00	Lexmark CX930, 931, XC9325, 9335 40K Waste Container
<b>P/N</b>	<b>Paper Handling</b>
32D0800	CX93x, MX93x 520-Sheet Tray
32D0801	CX93x, MX93x 520-Sheet Tray with Caster Cabinet
32D0802	CX93x, MX93x 3 x 520-Sheet Tray with Caster
32D0803	CX93x/MX93x 2520-Sheet Tandem Tray with Caster
32D0804	CX93x/MX93x Envelope Tray
32D0816	CX93x/MX93x/CS94x/CX94x 2000-Sheet Tray
32D0818	CX93x/MX93x Dual Catch Bin
32D0820	CX93x/MX93x/CS94x/CX94x 500-Sheet Staple Offset Finisher
32D0821	CX93x/MX93x 2000-Sheet Staple 2/3 Hole Punch Finisher
32D0822	CX93x/MX93x 2000-Sheet Staple 2/4 Hole Punch Finisher
32D0827	CX93x/MX93x 2000-Sheet Staple Swedish Hole Punch Finisher
<b>P/N</b>	<b>Memory Options</b>
27X0400	500+ GB Hard Disk
<b>P/N</b>	<b>Application Solutions</b>
57X0300	Contact Authentication Device
57X0301	Contactless Authentication Device
82S1203	IPDS License
82S1204	Bar Code License
<b>P/N</b>	<b>Connectivity</b>
1021294	USB Cable (2-meter)
27X6410	Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server
37X6350	Analog Fax Card
57X7040	English Keyboard Kit
SPD0001	Surge Protective Device, 110-120V
<b>P/N</b>	<b>Furniture</b>
32D0808	CX93x/MX93x Work Table

You can install one of the following: the Dual Catch Bin or the Inline Staple Finisher or the Staple Hole Punch Finisher. To install the Staple Hole Punch Finisher, you must also install the 520-Sheet Tray with Caster Cabinet, the 3x520-Sheet Tray with Casters, or the 2,520-Sheet Tandem Tray with Casters. To install the 2,000-Sheet Tray (sidecar), you must also install the 3x520-Sheet Tray with Casters or the 2,520-Sheet Tandem Tray with Casters. It will not work with the 520-Sheet Tray with Caster Cabinet. To install the Envelope Tray, you must remove Tray 1 and replace it with the Envelope Tray.

Product Specifications		Lexmark CX931dtse
<b>Printing</b>		
Display	Lexmark e-Task 7-inch (17.8 cm) color touch screen	
Print Speed	Up to: Black: 35 ppm <sup>1</sup> (Letter) / Color: 35 ppm <sup>1</sup> (Letter)	
Time to First Page	As fast as: Black: 7.2 seconds / Color: 6.2 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi) / Color: 1200 x 1200 dpi, 2400 IQ (2400 x 600 dpi)	
Memory	Standard: 4096 MB / Maximum: 4096 MB	
Hard Disk	Intelligent Storage Drive included; Magnetic Hard Disk available	
Recommended Monthly Page Volume	4,000 - 20,000 pages <sup>2</sup>	
Maximum Monthly Duty Cycle	Up to: 150 000 pages per month <sup>3</sup>	
<b>Copying</b>		
Copy Speed	Up to: Black: 35 cpm <sup>1</sup> (Letter) / Color: 35 cpm <sup>1</sup> (Letter)	
Time to First Copy	As fast as: Black: 9.1 seconds / Color: 8 seconds	
<b>Scanning</b>		
Scanner Type / ADF Scan	Flatbed scanner with automatic document feeder / RADF (Reversing Duplex)	
A4/Ltr Duplex Scan Speed	Up to: Black: 19/19 sides per minute / Color: 19/19 sides per minute	
A4/Ltr Simplex Scan Speed	Up to: Black: 39/39 sides per minute / Color: 39/38.8 sides per minute	
ADF Paper Input Capacity	Up to: 110 pages 20 lb or 75 gsm bond	
<b>Supplies<sup>4</sup></b>		
Laser Cartridge Yields	up to: 16,500 <sup>5</sup> -page Color (CMY) Cartridges / up to: 28,000 <sup>5</sup> -page Black Cartridge	
Cartridge(s) Shipping with Product	5,000 <sup>5</sup> -page Black and Color (CMYK) Toner Cartridges	
<b>Paper Handling</b>		
Included Paper Handling	100-Sheet Multipurpose Feeder, 400-Sheet Output Bin, 520-Sheet Tray, 3 x 520-Sheet Tray/Caster	
Optional Paper Handling	520-Sheet Tray/Caster Cabinet, 520-Sheet Tray, Inline Stapler, Dual Catch Bin, Envelope Tray, Staple Punch Finisher, 2520-Sheet Tandem Tray/Caster, Work table, 2000-Sheet Tray	
Paper Input Capacity	Up to: Standard: 2180 pages 20 lb or 75 gsm bond / Maximum: 4180 pages 20 lb or 75 gsm bond	
Paper Output Capacity	Up to: Standard: 400 pages 20 lb or 75 gsm bond / Maximum: 2000 pages 20 lb or 75 gsm bond	
Media Types Supported	Labels, Card Stock, Plain Paper, Envelopes, Glossy Paper, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, JIS-B4, 9 Envelope, JIS-B5, A3, Ledger, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, C4 Envelope, Statement, C5 Envelope, Executive, DL Envelope, Folio, 10 Envelope	
<b>General Information</b>		
Standard Ports	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), USB 2.0 Specification Hi-Speed Certified (Type B)	
Optional Network Ports	Marknet N8372 WiFi Option	
Noise Level	Operating: 50 dBA (Print) / 55 dBA (Copy) / 55 dBA (Scan)	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity / Altitude: 0 - 2500 Meters (8,200 Feet) / Temperature: 10 to 32°C (50 to 90°F)	
Limited Warranty	See Statement of Limited Warranty: 1-Year Onsite Repair, Next Business Day	
Size / Weight	H x W x D: 44.1 x 23.2 x 27.5 in. / 213.6 lb.	
ENERGY STAR Typical Electricity Consumption	TEC: 0.53 kilowatt-hours per week	

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

<sup>1</sup> Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

<sup>2</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>3</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>4</sup> Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details. <sup>5</sup> Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2022 Lexmark. All rights reserved.

Lexmark and the Lexmark logo are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries and regions. MOPRIA®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT is a trademark of the Green Electronics Council in the United States and other countries. PANTONE® is the property of Pantone LLC. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

