

PLP-UNM(-S)
PLP-UNMP(-S)

Universal Adaptor Bracket

For 22" to 46" Displays

The Universal Display Adaptor offers unparalleled compatibility with medium to large sized displays between 22" to 46" weighing up to 150lb (68kg). Designed to quickly and easily attach to many Peerless-AV® display mounts that incorporate the Peerless-AV PLP mounting pattern. Mount the display with confidence knowing the included security hardware will help prevent theft (included as standard on PLP-UNM(-S))

FEATURES

- Universal plate fits virtually any 22" to 46" display
- Compatible with many Peerless-AV® display mounts (mounts sold separately)
- Security models are standard for effective theft deterrence. Non-security models provided with Phillips head screws (PLP-UNMP(-S))
- Plate and brackets hold up to 150lb (68kg)
- Heavy gauge cold rolled steel construction
- Available in black or silver



Display size: 22" -46"



Max load: 150lb (68kg)



PLP-UNM(-S)	Security Universal Adaptor Bracket for 22" to 46" Displays
PLP-UNMP(-S)	Non-security Universal Adaptor Bracket for 22" to 46" Displays

Product Specifications

	DIMENSIONS (W x H)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
PLP-UNM(P)(-S)	19.25" x 13.75" (489 x 349mm)	7.2lb (3.3kg)	150lb (68kg)	Powder coat	Black or silver


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
PLP-UNM(P)(-S)	7.75" x 3.625" x 19.75" (197 x 92 x 502mm)	8.9lb (4kg)	PLP-UNM: 735029244851 PLP-UNM-S: 735029244868 PLP-UNMP: 735029244875 PLP-UNMP-S: 735029244882	Adaptor plate, two brackets, mounting hardware and wrenches	1


Compatible with:

Many Peerless-AV® Display Mounts
Contact Peerless-AV Customer Care for more information.


All dimensions = inch (mm)

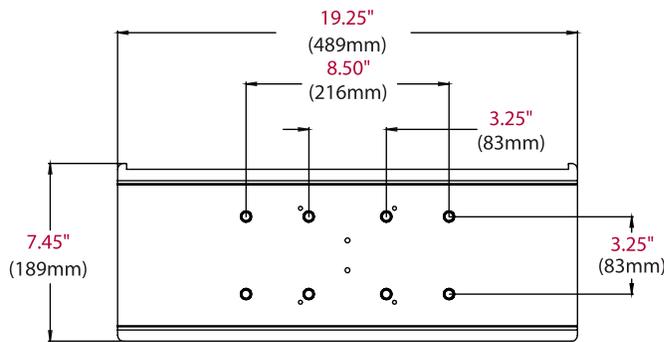

UNIVERSAL PLP PLATE

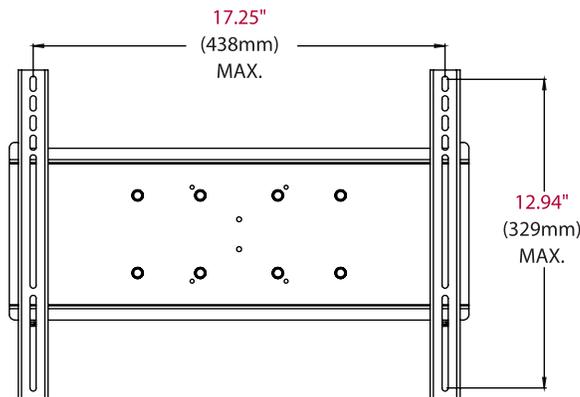

FRONT VIEW

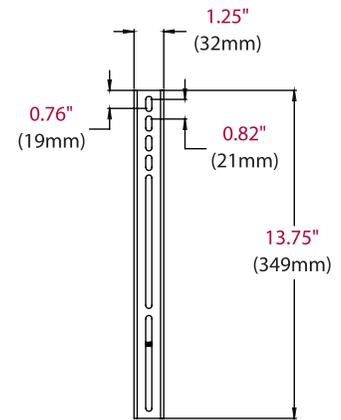

ADAPTOR BRACKET

ARCHITECTS SPECIFICATIONS

The Universal Adaptor Bracket shall be a Peerless-AV model PLP-UNM(P)(-S) and shall be located where indicated on the plans. It shall be constructed of heavy gauge cold rolled steel. Assembly and installation shall be done according to instructions provided by the manufacturer.