


## Single-Gang Surface Mounting Box, UK Style, 86 x 86 x 47 mm, White

MODEL NUMBER: **N042U-MB1**

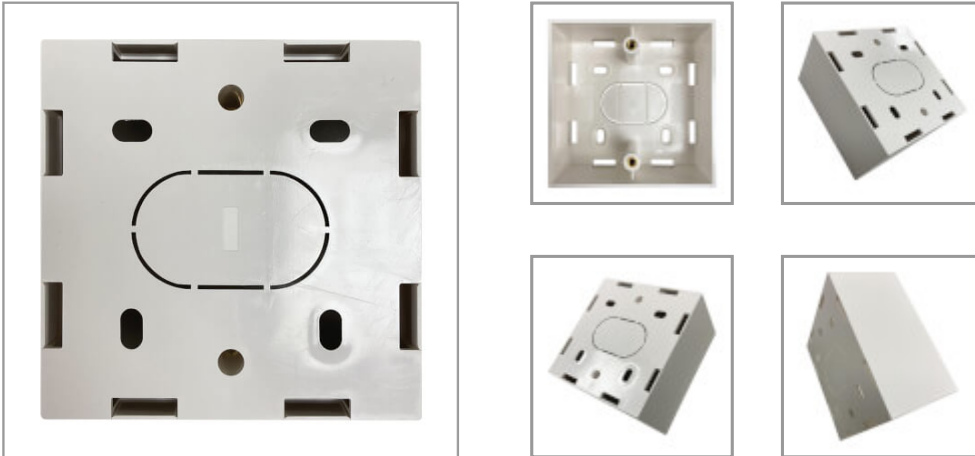

Works with a compatible wall plate to complete in-wall audio/video, voice and Ethernet connections using any type of keystone jack.

### Features

#### UK-Style Back Box Connects Audio/Video, Voice and Data Cable Lines in Your Network

This single-gang box combines with a Tripp Lite or other compatible wall plate (sold separately) to complete a premise wiring application, such as home theater (audio/video), VoIP phone (voice) or Ethernet (data) network.

#### High-Impact Construction Designed to Blend In Seamlessly with Your Room

This durable white mounting box blends elegantly into any home or office décor for a sleek, professional installation. Mounting screws are included. The ABS plastic construction meets UL 94V-0 flame-retardant standards for protection against fire and high heat.

#### Compatible with U.K. Applications

The N042U-MB1 is designed to work with standard single-gang wall plates measuring 86 x 86 millimeters. Compatible Tripp Lite models include N042U-WK1-S, N042U-WK2-S, N042U-WK1-SA, N042U-WK2-SA, N042U-W01-ST, N042U-W02-ST, N042U-W01-S, N042U-W02-S, N042U-W04-S, N042U-WF1-1 and N042U-WF1-6C.

## Specifications

OVERVIEW	
UPC Code	037332269355
Accessory Type	Wall Plate
Technology	Cat5/5e; Cat6; Cat6a; USB 2.0 (High Speed); HDBaseT; HDMI; DisplayPort
Country/Region	UK
PHYSICAL	

### Highlights

- Ideal for completing home theater, VoIP or Ethernet wiring installations
- High-impact plastic construction designed to blend in with your home/office décor

### Package Includes

- N042U-MB1 Single-Gang UK-Style Mounting Box, White
- (2) Mounting screws

Color	White
Material of Construction	ABS
Total Number of Ports	0
Unit Dimensions (hwd / in.)	3.390 x 3.390 x 1.850
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	14 TO 140 F (-10 to 60 C)
Storage Temperature Range	-40 TO 154.4 F (-40 to 68 C)
Operating Humidity Range	10% TO 90% RH, (NON-CONDENSING)
Storage Humidity Range	10% TO 90% RH, (NON-CONDENSING)
<b>FEATURES &amp; SPECIFICATIONS</b>	
Antibacterial	No
<b>STANDARDS &amp; COMPLIANCE</b>	
Product Certifications	UL 94; UL Listed; cUL Listed
Product Compliance	RoHS; REACH; Trade Agreements Act (TAA)
<b>WARRANTY &amp; SUPPORT</b>	
Product Warranty Period (Worldwide)	Lifetime limited warranty