
SPEAKER WALL MOUNT— INSTALL GUIDE WMIC2-BRK

For initial setup the speaker system can be assembled and tested on a table top. Then install on the wall.

1. Remove the 2 clips on the speakers.






Wall bracket (Top) and speaker bracket (bottom) with screws for installation. Two sets are included.



3. Attach bracket to wall with 3 screws

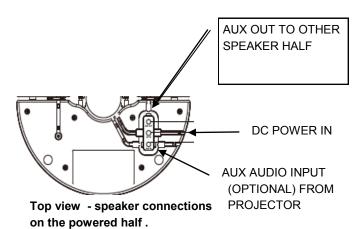





2. Attach bracket to speaker with 4 screws



4. Slide speaker on wall bracket and tighten bottom center screw of bracket to lock in place.

Repeat mounting procedure with the other halfround speaker.

Then connect the audio cables and power. Use a 3.5mm mini stereo adapter for the remote speaker half.

DUKANE CORP AV 2900 Dukane Drive St Charles, IL 60174 800-676-2487

Fax 630-584-5156

avservice@dukane.com http://www.dukane.com/av/service/

