


## 40/100G Multimode 50/125 OM4 Fiber Optic Cable (12F MTP/MPO-PC to 4x Duplex LC/PC F/M), LSZH, Magenta, 1 m (3.3 ft.)

MODEL NUMBER: N845X-01M-8L-MG

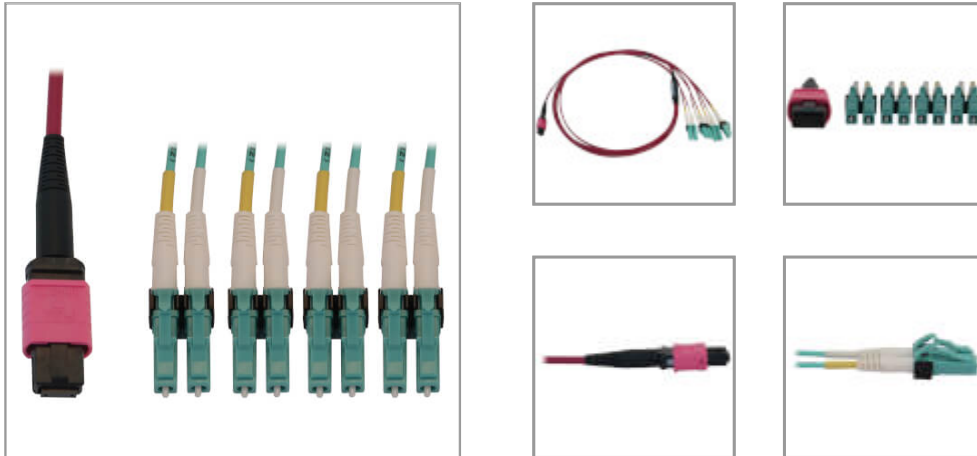

40/100 GbE Ethernet cable extends high-density network connections in enterprise applications in data centers, telecom rooms and wiring closets.

### Features

#### 40/100 GbE Cable Supports Higher Bandwidths Needed for High-Density Data Networking

As the amount of traffic in data networks grows, so does the need for devices and fiber cables to support higher bandwidths for high-density patching between data center MDFs and IDF in enterprise installations. This multimode 50/125 OM4 fan-out cable is an ideal choice for 100 Gb Ethernet applications up to 100 meters (328 feet) at 850 nm. It is also backward compatible with 10 Gb and 25 Gb networks, so you can future-proof your current application for an eventual upgrade to 400 Gb.

#### Switchable LC Connectors Allow Easy Polarity Conversions

The switchable LC/PC duplex ends let you easily switch the fiber polarity without tools or the need to re-terminate the connectors. Use the detachable clip to keep the connectors in place while in use.

#### Magenta Jacket Helps Avoid Misidentification That Can Cause Costly Downtime

The OM4-rated cable has a magenta jacket to identify it as multimode in a crowded patch panel or switch and prevent it from becoming accidentally disconnected. The round low-smoke zero-halogen (LSZH) jacket limits the amount of toxic smoke emitted in case of combustion, making it suitable for poorly ventilated areas. The connectors' slim boots allow easy one-handed installation and removal of the cable.

## Specifications

OVERVIEW	
UPC Code	037332272317
Technology	Fiber; Multimode
Optical Mode	OM4

### Highlights

- OM4-rated cable recommended for 100 Gb speeds up to 100 meters (@ 850 nm)
- Switchable LC connectors allow polarity conversion without tools or re-termination
- Backward compatible with 10/25/40 Gb networks to facilitate future-proofing
- Magenta LSZH jacket allows easy ID in a crowded switch or patch panel

### Package Includes

N845X-01M-8L-MG 40/100G Multimode 50/125 OM4 Fiber Optic Cable, Magenta, 1 m (3.3 ft.)



<b>PHYSICAL</b>	
Cable Jacket Color	Magenta
Connector Color	Aqua; Magenta; Black
Cable Jacket Material	LSZH
Cable Jacket Rating	OFNR
Clad Diameter (microns)	125.0
Core Diameter (microns)	50.0
Primary Coating Diameter (microns)	245.0
Number of Fibers	8
Cable Length (ft.)	3.3
Cable Length (m)	1.01
Cable Length (in.)	39.4
Minimum Bend Radius	20MM (Dynamic); 10MM (Static)
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	-4 to 140 °F (-20 to 60 °C)
Storage Temperature Range	-4 to 140 °F (-20 to 60 °C)
Relative Humidity	5% to 85% RH, Non-Condensing
<b>COMMUNICATIONS</b>	
Network Compatibility	10 Gbps; 40 Gbps; 100 Gbps; 400 Gbps
Attenuation @ 850NM	3.5 dB/Km
Attenuation @ 1300NM	1.5 dB/Km
Insertion Loss	0.35dB
<b>CONNECTIONS</b>	
Side A - Connector 1	12-STRAND MTP/MPO (FEMALE)
Side B - Connector 1	(4) LC DUPLEX (MALE)
Endface Polish	PC
<b>FEATURES &amp; SPECIFICATIONS</b>	
Push/Pull Tabs	Yes
Breakout	Yes
Trunk	Yes
<b>STANDARDS &amp; COMPLIANCE</b>	



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Certifications	RoHS, REACH, CE, UL1666
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2021 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>